

DOORS AND
IRONMONGERY






White oak veneer
with divided 'D' shape
vision panel, using
bead style H10








Standard Vision Panel Range




Vision Panel Size <small>including multi-panel design</small>		
Door Action	FD30 Maximum Area m ²	FD60 Maximum Area m ²
latched single doors	0.80	0.60
unlatched single doors		
latched double doors	0.50	0.55
unlatched double doors		

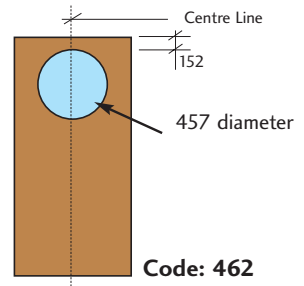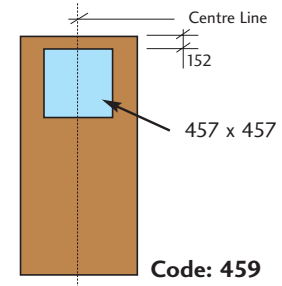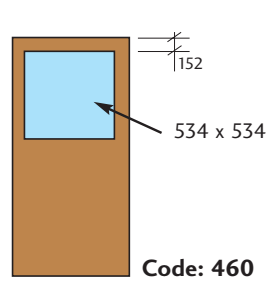

Approved Fire Glass				
Thickness	Brand Name	Finish	FD30	FD60
6mm	Komfort	clear	✓	
	Pyran		✓	✓
	Pyrocet		✓	
7mm	Pyrobelite	wired	✓	
	Pyroshield		✓	✓

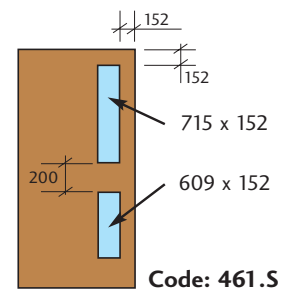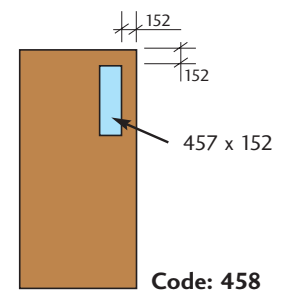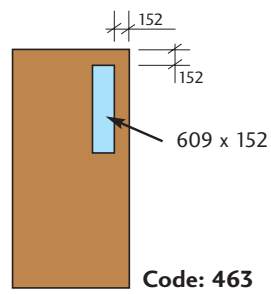

Other shapes and sizes of vision panels are available to order either non-fire or fire rated. (size and position limitations apply)

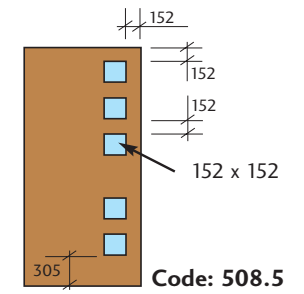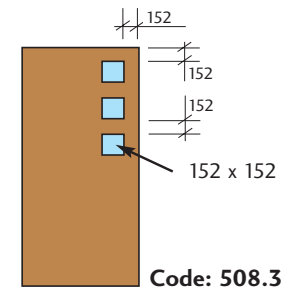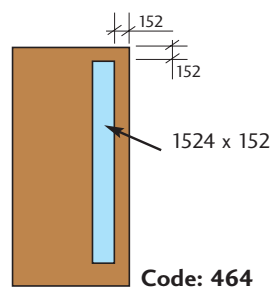


Product Performance Certificates

Manufacturing winning interior products is not just about aesthetics. It means ensuring that all aspects of a product can deliver the very highest levels of performance, particularly in structural strength, fire and sound.

When it comes to the workplace environment, Komfort redefines the concept of safety with an aggressive programme of product development and testing.

Confidence in Komfort's products arises from the fact that they are independently tested at authorised laboratories. Each test is conducted in accordance with the relevant British Standard and the results are available, on request, in the form of a Summary of Performance and full test reports.

Specifiers may rest assured that Komfort never compromises the safety of its products and the employees they surround.

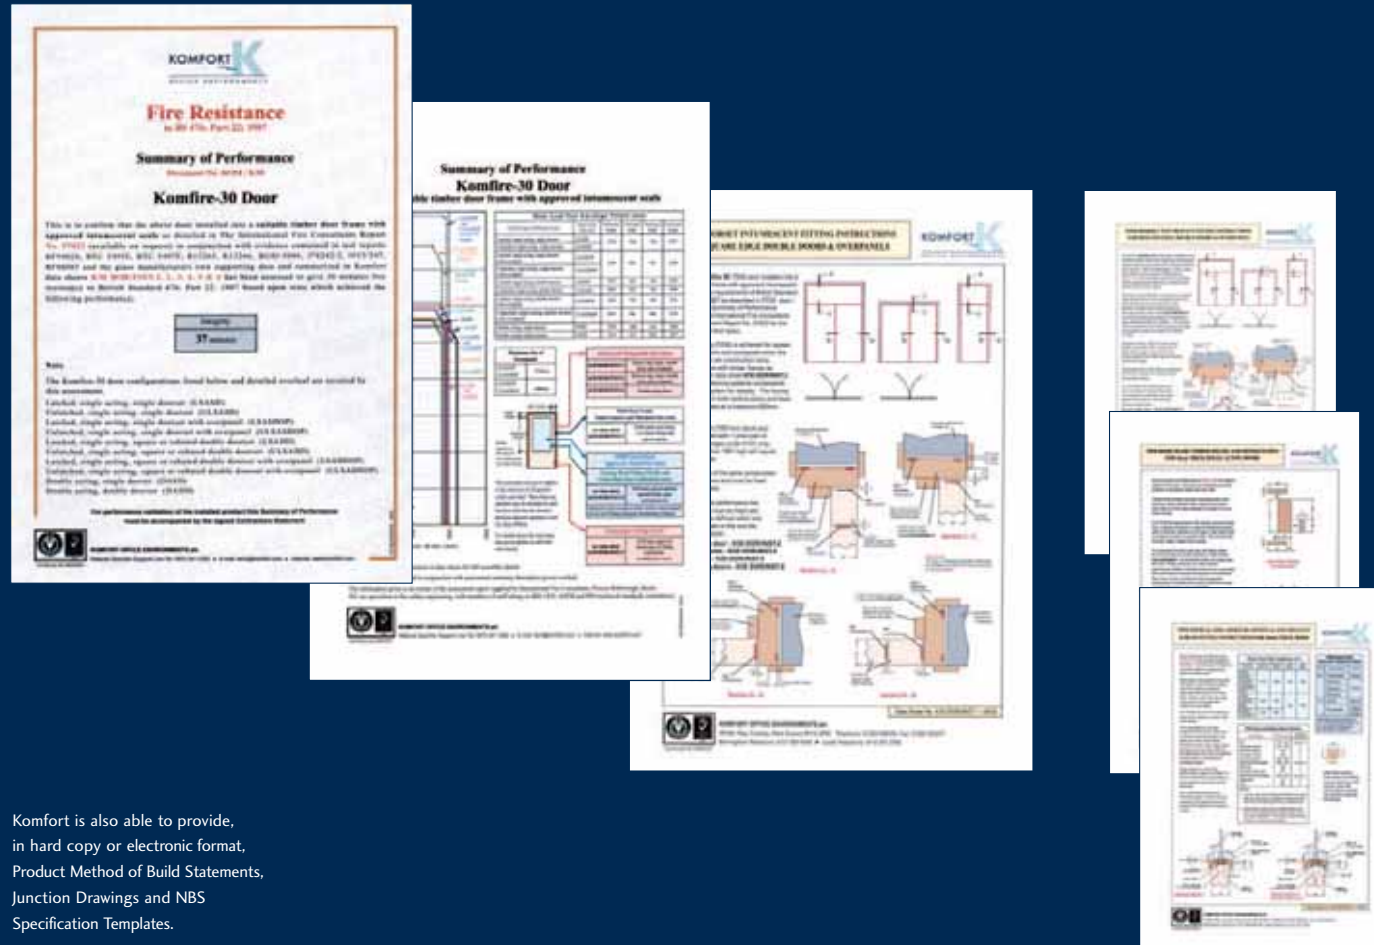

Komfort is also able to provide, in hard copy or electronic format, Product Method of Build Statements, Junction Drawings and NBS Specification Templates.

Lever Handles

Komfort's lever handles range in design from classic to contemporary to accommodate most architectural trends. They are available in various finishes and can be matched with equivalent pull handles.

The illustrated stainless steel lever furniture is manufactured from Grade 316 material which is highly resistant to oxidization and corrosion.

A



B



C



D



A 5041

Available finishes:
 Satin Stainless Steel
 Polished Stainless Steel
 Polished Stainless Steel Textured

Dimensions: 25mm diameter lever handle
 on 5mm thick sprung round rose

B 5032/5040

Available finishes:
 Satin Anodised Aluminium
 Polished Anodised Aluminium
 Satin Stainless Steel
 Polished Stainless Steel
 Polished Stainless Steel Textured
 Polished Brass
 Polish Brass Textured

Dimensions: 5032 – 19mm diameter lever handle
 on 5mm thick sprung round rose

Dimensions: 5040 – 22mm diameter lever handle
 on 9mm thick sprung round rose

C 5042

Available finishes:
 Satin Stainless Steel
 Polished Stainless Steel
 Polished Stainless Steel Textured
 Polished Brass
 Polish Brass Textured

Dimensions: 19mm diameter lever handle
 on 9mm thick sprung round rose

D 5043

Available finishes:
 Satin Stainless Steel
 Polished Stainless Steel
 Polished Stainless Steel Textured

Dimensions: 13mm thickness lever handle
 on 9mm thick sprung round rose

Cylinders, Snibs, Releases & Escutcheons

To suite with Komfort's lever handles and locks is a choice of practical yet elegant cylinders, snibs and escutcheons in both oval and European profiles. The items shown are manufactured from Grade 316 material which is highly resistant to oxidization and corrosion.

Oval Profile

Oval profile cylinders are available in standard lengths of 60mm and 70mm. Comes with 3 keys.



574 S/U & P/U

Available Finishes:
Satin nickel plated
Polished chrome plated

574 Thumbturn

European Profile

European profile cylinders are available in standard lengths of 60mm and 70mm. Comes with 3 keys.



574E S/U & P/U

Available Finishes:
Satin nickel plated
Polished chrome plated

574E Thumbturn

A



574 Cylinder

B



574E Cylinder



5152

Snib and indicator with 5mm spindle and emergency release mechanism



A 5093/5094

5093 – 5mm thick standard cylinder escutcheon to suit 5032 lever handle

5094 – 9mm thick standard cylinder escutcheon to suit 5040 lever handle

B 5094/5194

5094 – 5mm thick oval cylinder escutcheon to suit 5032 lever handle

5194 – 9mm thick oval cylinder escutcheon to suit 5040 lever handle



C 5095/5195

5095 – 5mm thick euro profile escutcheon to suit 5032 lever handle



5195 – 9mm thick euro profile escutcheon to suit 5040 lever handle

Standard Door Frames Aluminium Extrusion



Frames are powder coated to specified
standard RAL and BS colours

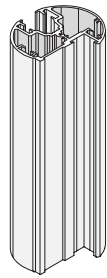


Code: SJ6
Single Glazed Polar
Single acting door frame
(Non-fire performance)

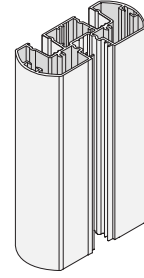


Code: DGP3
Double Glazed Polar
Single acting door frame
(Non-fire performance)

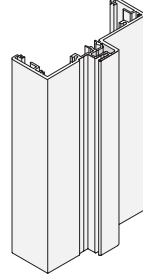



Code: PSQ4
Polar 100
Single acting door frame
(Non-fire performance)

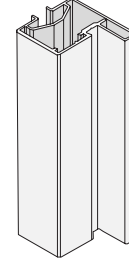

Code: C6HAHU / C6HASU
Precision C64
Single acting door frame
(30 minute fire performance)

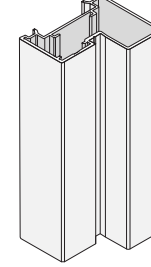


Code: CXA12
Precision CX
Single acting door frame
(30 minute fire performance)

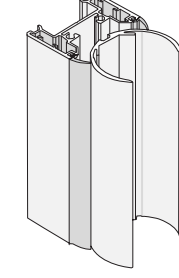



Code: CXA 200 / CXA 203
Precision CX
Double acting swing door frame
using 54mm thick door
(30 minute fire performance)




Code: 628
600 Series
Single acting door frame
(Non-fire performance)





Code: 629
Kameo 50
Single acting door frame
(Non-fire performance)

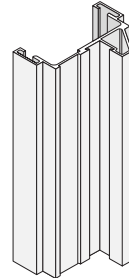

Code: 816
Komfire 75
Single acting door frame
(30 minute fire performance)

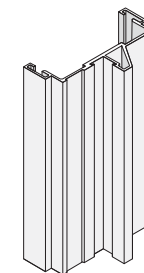

Code: 826
Komfire 100
Single acting door frame
(30 minute fire performance)

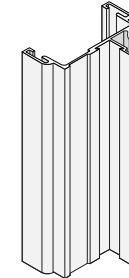



Code: M58
Kameo 75 and Mirage
Single acting door frame
(30 minute fire performance)

Standard Door Frames Timber and Veneered

***Standard Timbers:**
 Utile
 Ash
 Steam Beech
 Oak
 Cherry
 Joinery quality softwood



#Standard Veneer Profiles:
 White Oak
 Ash
 Maple
 Steam Beech
 Cherry

Bespoke profiles and other timber species available on request.

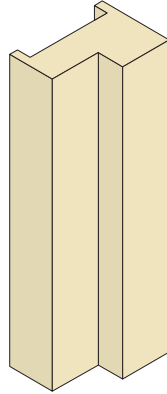



Code: A79*
 Single acting door frame
 for 75mm system

FD30

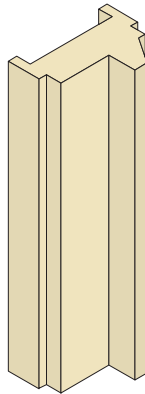



Code: B106*
 Single acting door frame
 for 75mm Komfire
 partitioning system

FD30

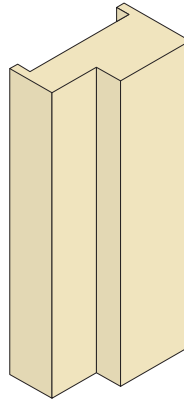



Code: A104*
 Single acting door frame
 for 100mm system

FD60

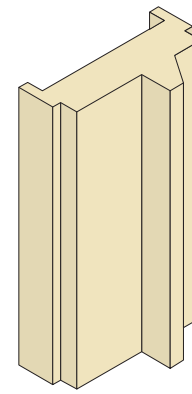

Code: B206*
 Single acting door frame
 for 100mm Komfire
 partitioning system

FD60

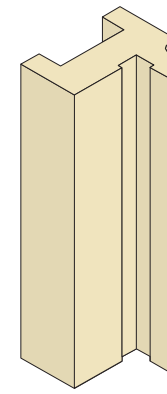

Code: TP538#
 Single acting veneered
 door frame for 75mm
 Klassic partitioning system

FD30